


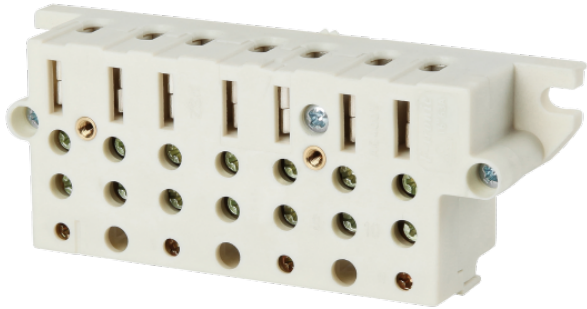

Meter plug-in terminal three-phase current

Order number: 7110003  
Type: ZSK63A

Zählersteckklemme Drehstrom. Bemessungsstrom 63 A. Schutzart IP30. Anzahl Pole: 4-polig.

Environmental conditions

|                                         |        |
|-----------------------------------------|--------|
| Ambient temperature (24h)               | 65 °C  |
| Ambient temperature (maximum)           | 80 °C  |
| Ambient temperature (minimum)           | -25 °C |
| Max. rel. humidity at 25°C (short term) | 95 %   |
| Max. rel. humidity at 40°C              | 50 %   |

Material

Conductor material  
Housing material

Properties

|                           |                     |
|---------------------------|---------------------|
| Can be lead sealed        | -                   |
| Degree of protection (IP) | IP30                |
| Free of heavy metals      | true                |
| Halogen-free              | true                |
| Insulation                | Protection class II |
| PVC-free                  | true                |
| Silicone-free             | true                |
| Stackable                 | -                   |
| Weather-resistant         | -                   |

Technical features

|                |       |
|----------------|-------|
| Design current | 63 A  |
| Design voltage | 400 V |
| Torque         | 1     |

Certificates & standards

|                |        |
|----------------|--------|
| CE             | true   |
| Glow wire test | 960 °C |
| REACH          | true   |
| RoHS           | true   |
| Standards      |        |
| VDE            | true   |

Accessories

Recommended purchase