


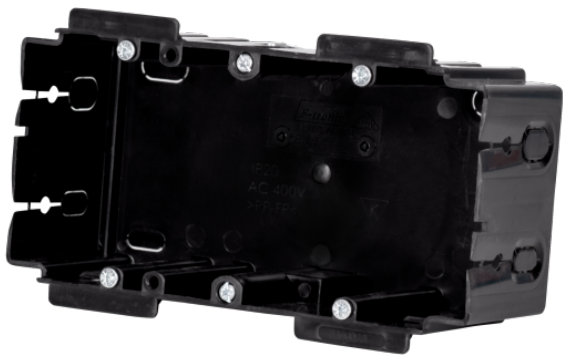

suspended cable trunking box

Order number: 7370040  
Type: E834

Kabelkanaldose E834. Ausführung: 2-fach, für hängende Befestigung. 68x142x47mm

suitable for: Rehau Signo BK, BS, BA; Gewiss wall trunking;  
Licatec installation trunking BR

Dimensions

|        |        |
|--------|--------|
| Depth  | 47 mm  |
| Height | 68 mm  |
| Width  | 142 mm |

Environmental conditions

|                                         |        |
|-----------------------------------------|--------|
| Ambient temperature (24h)               | 35 °C  |
| Ambient temperature (maximum)           | 40 °C  |
| Ambient temperature (minimum)           | -25 °C |
| Max. rel. humidity at 25°C (short term) | 90 %   |
| Max. rel. humidity at 40°C              | 50 %   |

Material

|                 |    |
|-----------------|----|
| Socket material | PP |
|-----------------|----|

Properties

|                           |      |
|---------------------------|------|
| Can be lead sealed        | -    |
| Degree of protection (IP) | IP20 |
| Free of heavy metals      | true |
| Halogen-free              | true |
| Installation type         |      |
| PVC-free                  | true |
| Silicone-free             | true |
| Stackable                 | true |
| Weather-resistant         | -    |

Technical features

|                    |         |
|--------------------|---------|
| Cable entry        | 4       |
| Design voltage     | 400 V   |
| max. cross section | 2,5 mm² |
| Total inserts      | 4       |

Certificates & standards

|                |        |
|----------------|--------|
| CE             | true   |
| Glow wire test | 650 °C |
| REACH          | true   |
| RoHS           | true   |
| Standards      |        |
| VDE            | true   |