Product data sheet

VS5-7-RK

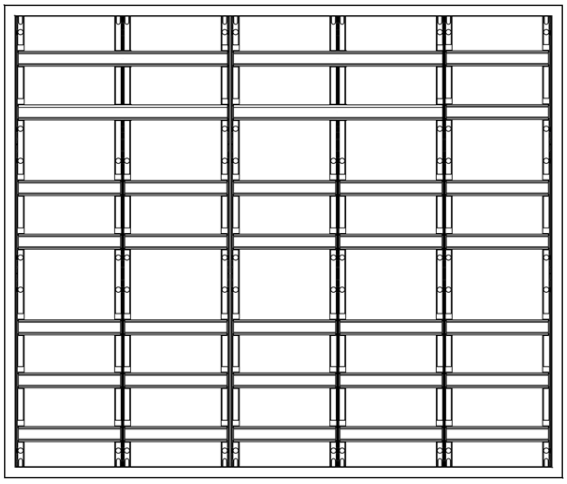

Distribution cabinet VS5-7-RK, 5-field, 7r, rail-mount terminals, 1100x1300x210mm

Product No.: 7110722

Type: VS5-7-RK

Lots of space for maximum distribution
- Housing in an appealing design of 1mm thickness, powder coated steel plate
- Unique, push-out fastening system, thus rapid and flexible wall mounting
- Door can be removed without tools and can be affixed to the left or right
- Large door opening angle
- Includes cover strips and PE-N plug-in terminals in scope of delivery
- Retractable mounting rails
- Large wiring space behind the standard mounting rails
- Cabinet depth incl. mounting straps 210mm
- Incl. 1x ZSSKN17N and 1x ZSSKPE34 plug-in terminal per field

Measures	
Height	1100 mm
Width	1300 mm
Depth	210 mm

Material	
Door material	Sheet steel powder-coated
Cover material	PS

Environmental conditions	
Ambient temperature (minimum)	-25 °C
Ambient temperature (maximum)	40 °C
Ambient temperature (24h)	35 °C
Max. rel. humidity at 25°C (short term)	95 %
Max. rel. humidity at 40°C	50 %

Technical features	
Design voltage	400 V
Permissible power loss according to DIN 43 873	without inner horizontal partitions 10 K = 68/60 watts 15 K = 113/100 watts 20 K = 162/143 watts 25 K = 213/189 watts 30 K =268/237 watts

© f-tronic GmbH. All rights reserved
www.f-tronic.de

Product data sheet

VS5-7-RK

Certificates & Standards	
CE	true
Glow wire test	750 °C
REACH	false
RoHS	true

Properties	
Installation type	SM
Degree of protection (IP)	IP31 / IP43
Insulation	Protection class II
Number of rows	7
Number of compartments	420
Number of fields	5
Stackable	true
Can be lead sealed	true
Free of heavy metals	true
PVC-free	true
Silicone-free	true

© f-tronic GmbH. All rights reserved
www.f-tronic.de