

**f-tronic®**

# UI,

## the most efficient foam box

Less foam. More time.



**The future of electrical installation starts now!**

[www.f-tronic.com](http://www.f-tronic.com)

# Foam instead of plaster

Foam socket boxes are revolutionising flush-mounted installation. No more tedious mixing of plaster - simply insert, fix, foam, and done! This saves valuable time and ensures a clean, fast and reliable installation.




### More space, less effort

30% more installation space and faster mounting, thanks to fixing with foam instead of plaster, compared to conventional flush-mounted boxes.



### Perfect alignment

Triple screw domes enable precise and easy adjustment of the devices, for fast, safe and precise installation.

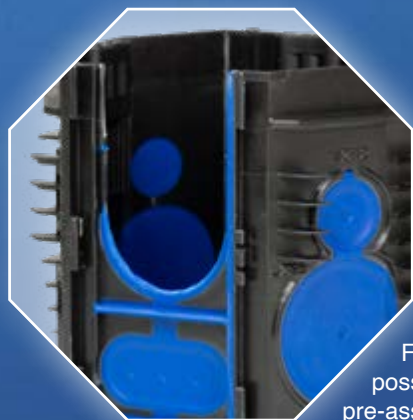


### Comfortable through-wiring

Fully insulated, airtight connection from box to box possible. For safe and efficient installation, ideal for pre-assembled combinations.



### Stable connection

Flexible plug-in/sliding system for stable, side-neutral connection of multiple sockets.

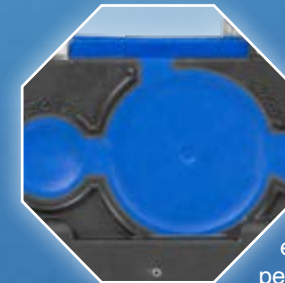


### Airtight installation

Thanks to f5 membrane technology, the entire installation remains reliably airtight - perfect sealing around pipes and cables.



### Efficient foam distribution

The innovative distribution system guides the foam precisely to where it is needed - for maximum hold and minimum waste of material.

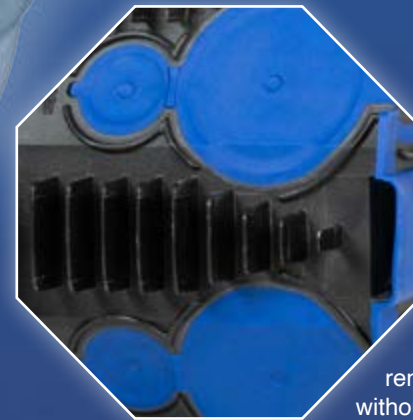

### Secure hold

Thanks to the integrated fins, the box remains firmly anchored in the wall even without foam, regardless of the type of stone.

[Mounting instructions](#)

[More information](#)

# Our solutions


for the modern flush-mounted installations

Be a pioneer and test the future of flush-mounted installation!



Type	UI10F	UI10T
Execution	Device socket	Device connection socket
Item No.	7320100	7320101
SU / CB / PL	20 / 200 / 4.000	20 / 200 / 2.400
Milling hole	Ø 82 mm	Ø 82 mm
Depth	48 mm	69 mm
max. cross section	2,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>
Material	PP / TPE	PP / TPE
Cable entry	2x ≤ Ø 12 mm	10x ≤ Ø 12 mm
Pipe entry	8x ≤ Ø 25 mm	8x ≤ Ø 25 mm

[To the product](#)

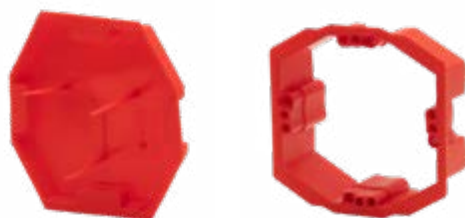

Type	UI10SD	UI10PA
Execution	Signal cover	Plaster levelling ring
Item No.	7390151	7390152
SU / CB / PL	40 / 1.000 / 20.000	10 / 450 / 9.000
Depth	-	10 - 25 mm
Material	PE	PS
suitable for	UI10 socket boxes	UI10 socket boxes